

Figure 1. Front view of fiber stress testing apparatus. The test frame can be constructed from standard 2" X 4" pine boards using a handsaw and an electric cordless drill.

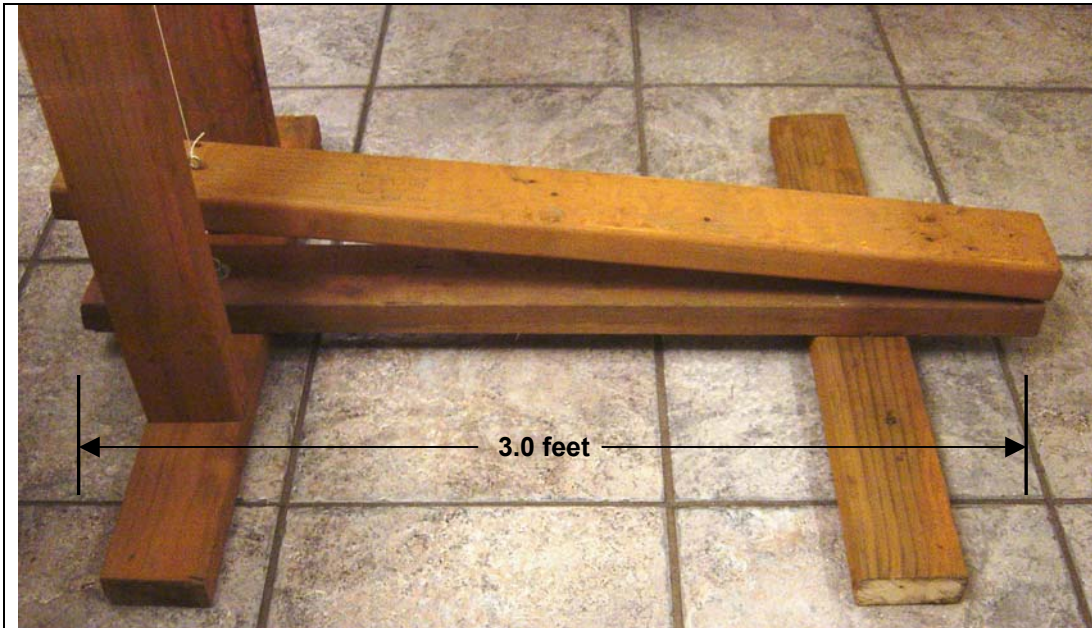


Figure 2. Side view of fiber stress testing apparatus. A simple lever can be constructed using a metal hinge and standard 2" X 4" pine boards.